

Sim-Plexity Single Monitor Stand Building Instructions




The following instructions are to be followed to ensure a correct assembly of the Sim-Plexity Single Monitor Stand. Before beginning the assembly follow these first steps:

1. Unbox the Sim-Plexity packages.
2. Sort the profiles by sizes. The following profiles are needed to assemble the monitor stand. The profiles are color-coded to better identify the different sizes of profiles in the following instructions.




3. Make space for the assembly of the monitor stand and always build on a soft surface to avoid scratches or damage to the profiles.

The following picture demonstrates how the brackets are attached to the profiles.

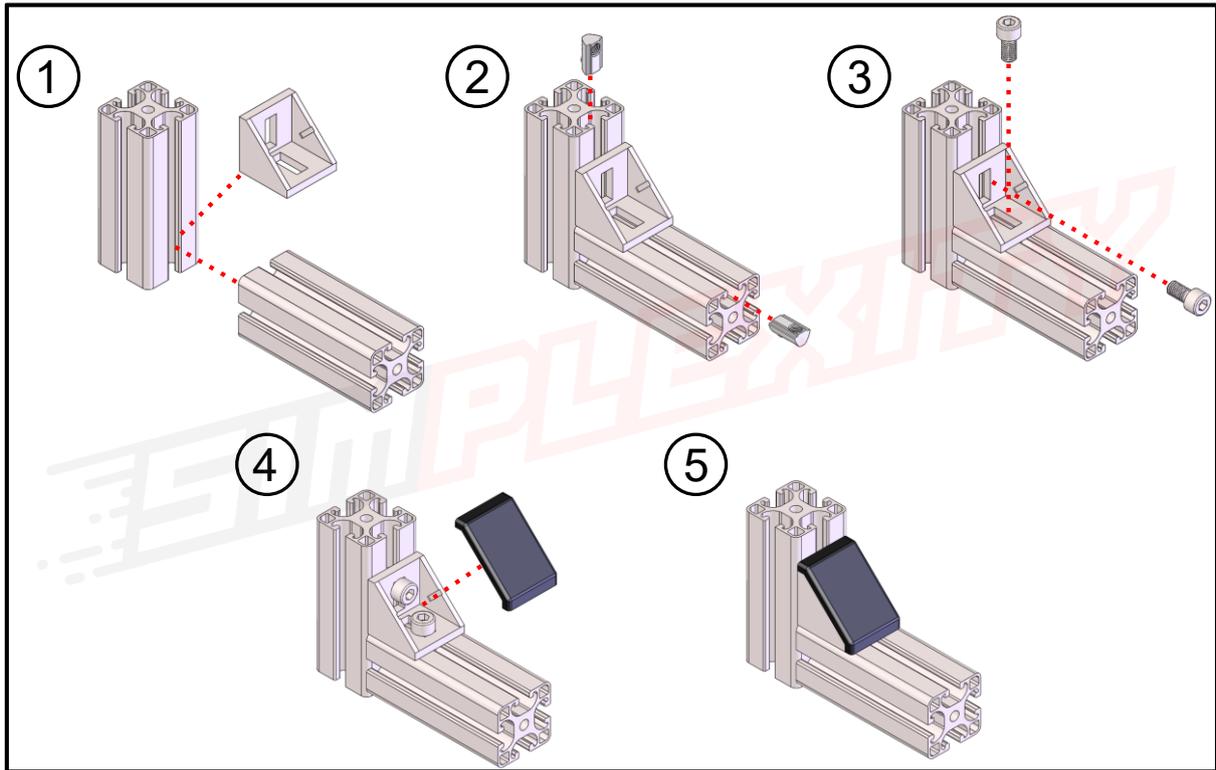


Assembly of the Monitor Stand


The following building instructions are meant as guideline to ensure a correct assembly of the Sim-Plexity Single Monitor Stand.

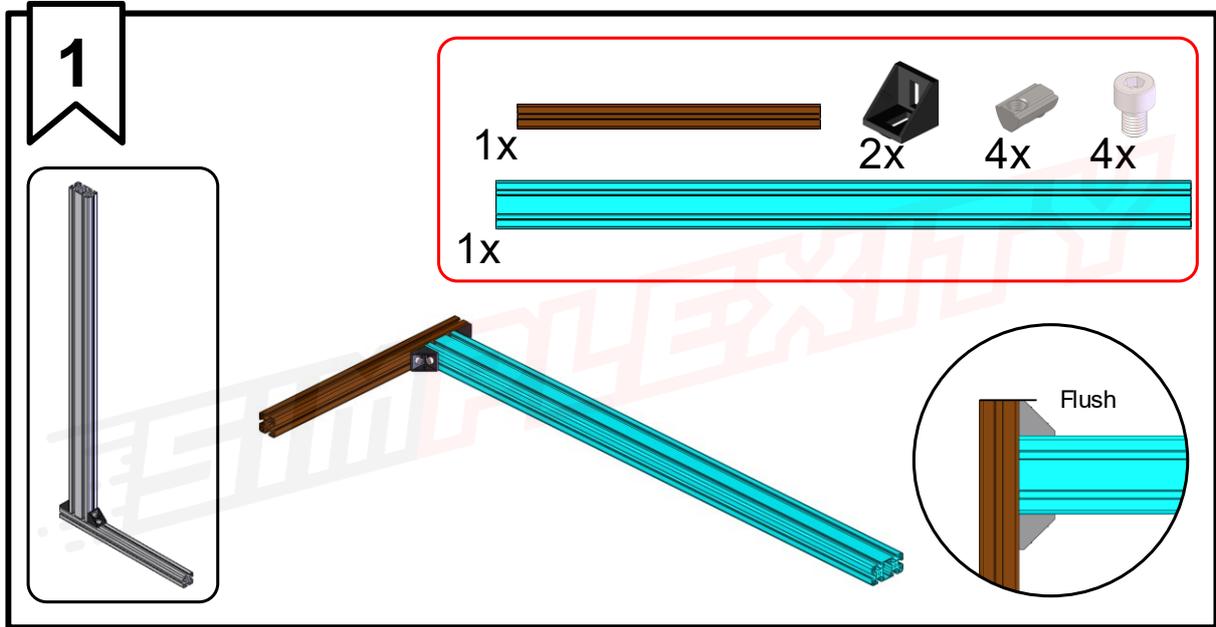

NOTICE


During step 2 it's necessary to break off the two of the guiding feet to properly mount the brackets. This can be done by prying them with a screwdriver as seen in the following illustration.

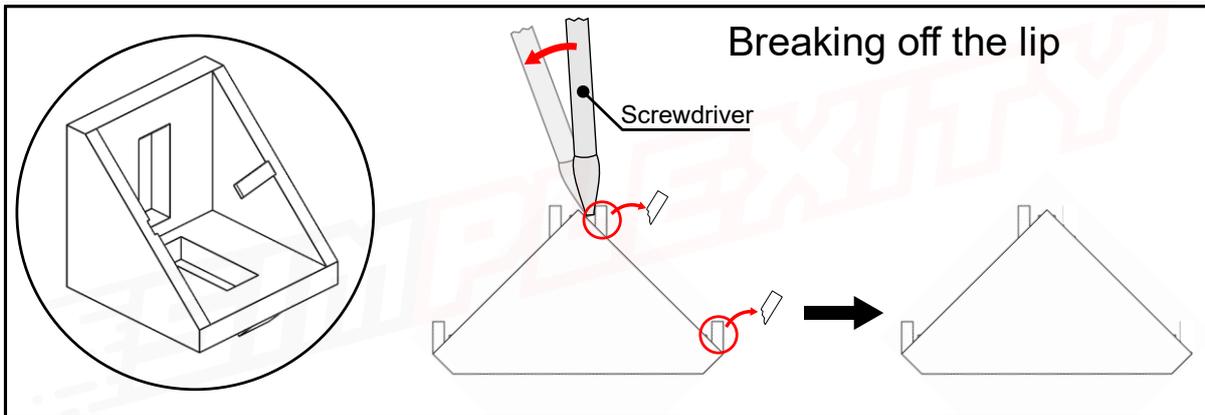

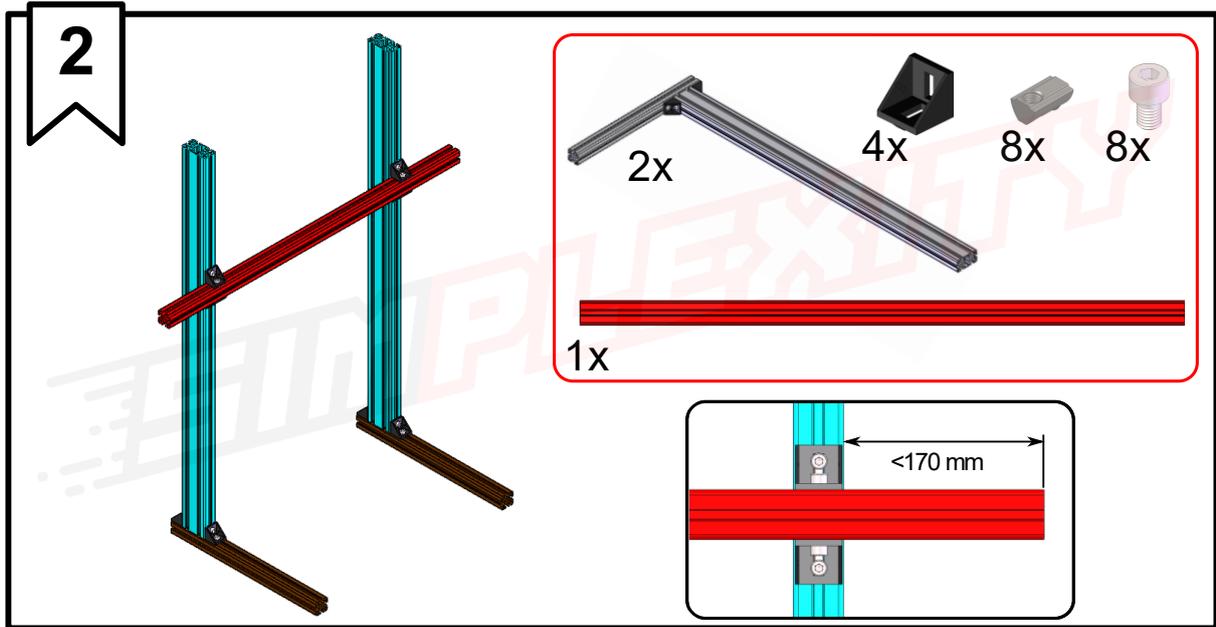


NOTICE

Before step 3 it's a good idea to mount the vesa bracket to the back of your monitor and then carefully mount the vesa bracket to the monitor stand.

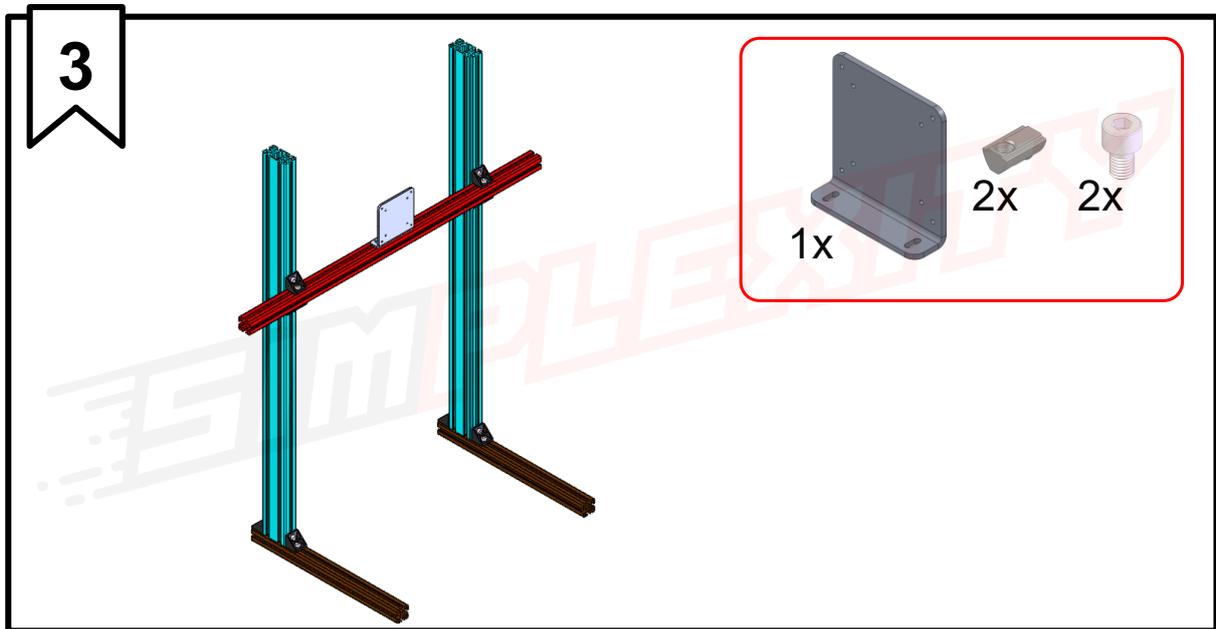

Now the height of the monitor can be adjusted to your suiting. Make sure everything is tight before finishing the build by putting covers on each open end of the aluminum profiles and side brackets, see the following illustration.

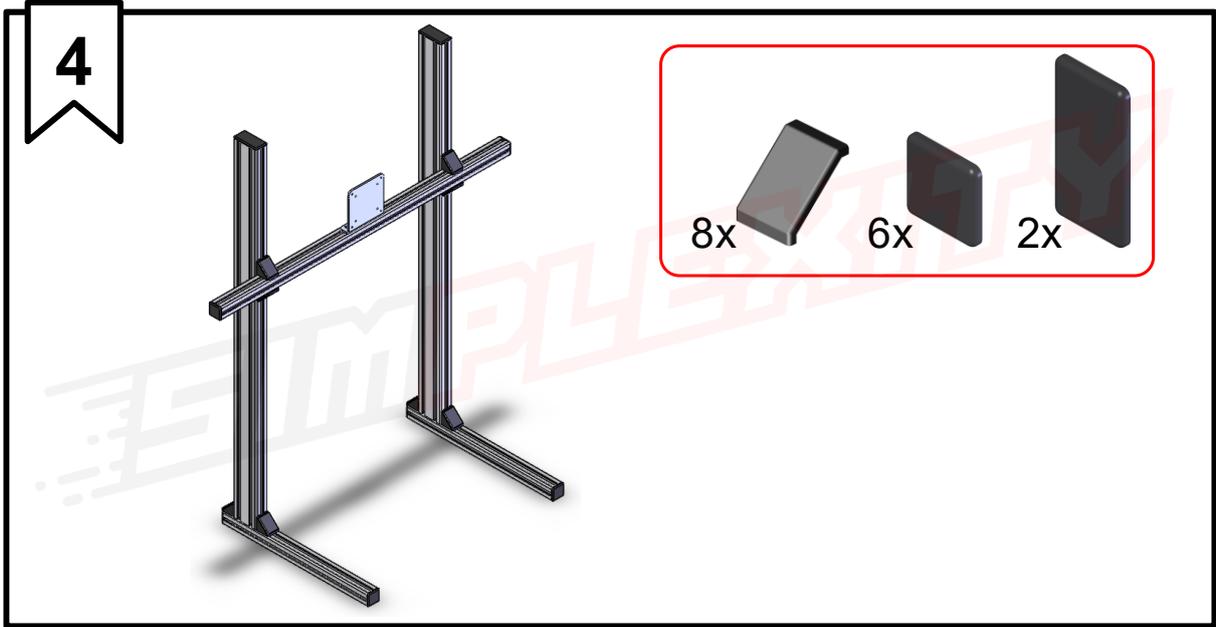

Then it's time to hit the track!